
ALS1

BUS PUBLIC ADDRESS SYSTEM

ALS1 | BUS RADIO & PASSENGER PA INTEGRATION

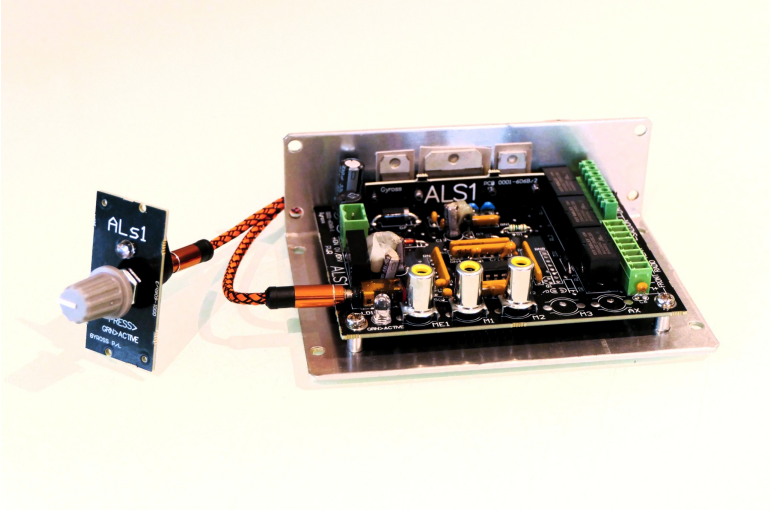

ALS1 control module with remote push-button volume control

Standalone PA or integrate with existing bus radio and saloon speakers.

INTEGRATED AUDIO

Radio and passenger PA through existing speakers

SIMPLE OPERATION

Push-button selection
Blue: radio / Green: PA

FLEXIBLE INPUTS

3 dynamic mics + optional electret mic and aux input

HOW THE ALS1 WORKS

Functional overview (not an installation wiring diagram)

Microphones + auxiliary audio

BUS RADIO
2 or 4 channels

ALS1
Audio / PA switching

SALOON SPEAKERS

Front driver speakers: radio in normal mode; muted in PA mode.

BLUE | NORMAL RADIO

Radio plays through front and rear speakers; PA inputs are inactive.

GREEN | PASSENGER PA

Front speakers muted; microphone and auxiliary inputs feed saloon speakers.

12-24 V DC | Multiple microphone inputs | Four-channel speaker interface

PL1 / SK1 8-way connectors allow easy restoration of original radio wiring.

Distributed by:

IMPORTANT: Not for speakers used for reversing alerts or other safety announcements.